


HSSE-CO



GFWFT (OHNE KANÄLEN)





GFOT (MIT KANÄLEN)



DIN 371 d1 ≤ 3/8 unc

DIN 376 d1 ≥ 7/16 unc

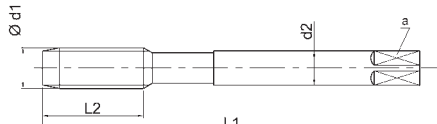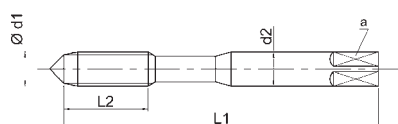

Bestell - Nr. - Cat. No.	GFWFT	GFOT		
Norm - Standard	DIN 371/376	DIN 371/376		
Schneidstoff - Tool material	HSSE-CO	HSSE-CO		
Oberfläche - Surface	T8	T8		
Toleranz - Tolerance	2BX	2BX		
Anschnittform - Chamfer form	C/2-3	C/2-3		

Einsatzgebiet - Application	1.1 - 1.2 - 1.3 - 1.4	1.1 - 1.2 - 1.3 - 1.4		
	2.1 - 2.2 - 2.3	2.1 - 2.2 - 2.3		
	4.1 - 4.2 - 4.3	4.1 - 4.2 - 4.3		
	5.1 - 5.2	5.1 - 5.2		

Ød1	TPI	L1	L2	Ød2	a	
UNC6	32	56	11	4	3	3,15
UNC8	32	63	13	4,5	3,4	3,8
UNC10	24	70	13	6	4,9	4,3
UNC12	24	80	16	6	4,9	5
UNC1/4	20	80	16	7	5,5	5,75
UNC5/16	18	90	18	8	6,2	7,25
UNC3/8	16	100	20	10	8	8,75
UNC7/16	14	100	20	8	6,2	10,3
UNC1/2	13	110	25	9	7	11,8
UNC9/16	12	110	28	11	9	13,3
UNC5/8	11	110	28	12	9	14,8
UNC3/4	10	125	32	14	11	17,9

Identnummer - Code	
GFWFTUNC6-32	GF0TUNC6-32
GFWFTUNC8-32	GF0TUNC8-32
GFWFTUNC10-24	GF0TUNC10-24
GFWFTUNC12-24	GF0TUNC12-24
GFWFTUNC1/4-20	GF0TUNC1/4-20
GFWFTUNC5/16-18	GF0TUNC5/16-18
GFWFTUNC3/8-16	GF0TUNC3/8-16
GFWFTUNC7/16-14	GF0TUNC7/16-14
GFWFTUNC1/2-13	GF0TUNC1/2-13
GFWFTUNC9/16-12	GF0TUNC9/16-12
GFWFTUNC5/8-11	GF0TUNC5/8-11
GFWFTUNC3/4-10	GF0TUNC3/4-10