

M MASCHINENGEWINDEBOHRER - MACHINE TAPS

Metrisches ISO - Regelgewinde DIN 13
ISO Metric coarse thread DIN 13

Gerade genutet mit Schälanschnitt
Straight flutes with spiral point

Toleranz: 6G - 6H+0,1
Tolerance: 6G - 6H+0,1




420-6G
420-6H+0,1





420-6G
420-6H+0,1

HSSE



DIN 371 d1 ≤ 10mm.

DIN 376 d1 ≥ 12mm.

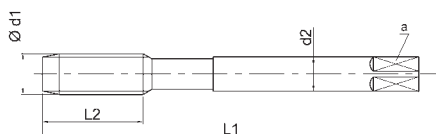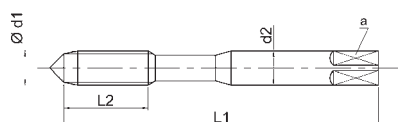

Bestell - Nr. - Cat. No.	420-6G	420-6H+0,1		
Norm - Standard	DIN 371/376	DIN 371/376		
Schneidstoff - Tool material	HSSE	HSSE		
Oberfläche - Surface	-	-		
Toleranz - Tolerance	6G/ISO3	6H+0,1		
Anschnittform - Chamfer form	B/4-5	B/4-5		

Einsatzgebiet - Application	1.1 - 1.2 - 1.3 - 1.4	1.1 - 1.2 - 1.3 - 1.4		
	4.1 - 4.2	4.1 - 4.2		
	5.1 - 5.2	5.1 - 5.2		

Ød1	p	L1	L2	Ød2	a		Identnummer - Code	
M3	0,5	56	10	3,5	2,7	2,5	420M03050-6G	420M03050-6H+0,1
M4	0,7	63	13	4,5	3,4	3,3	420M04070-6G	420M04070-6H+0,1
M5	0,8	70	13	6	4,9	4,2	420M05080-6G	420M05080-6H+0,1
M6	1	80	16	6	4,9	5	420M06100-6G	420M06100-6H+0,1
M8	1,25	90	18	8	6,2	6,8	420M08125-6G	420M08125-6H+0,1
M10	1,5	100	20	10	8	8,5	420M10150-6G	420M10150-6H+0,1
M12	1,75	110	25	9	7	10,3	420M12175-6G	420M12175-6H+0,1
M14	2	110	28	11	9	12	420M14200-6G	420M14200-6H+0,1
M16	2	110	28	12	9	14	420M16200-6G	420M16200-6H+0,1