

M MASCHINENGEWINDEBOHRER - MACHINE TAPS

Metrisches ISO - Regelgewinde DIN 13
ISO Metric coarse thread DIN 13

Roter Ring Mit Gerade Spiralnuten 40°
Red Ring Spiral Flutes 40°

HSSE/PM



2,5xØd1




Hard - 40°
H41TLW



3xØd1





Hard - 40°
H41TLWKK



DIN 371 d1 ≤ 10mm.

DIN 376 d1 ≥ 12mm.

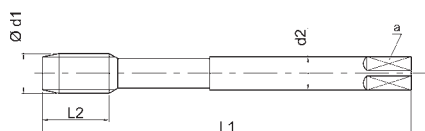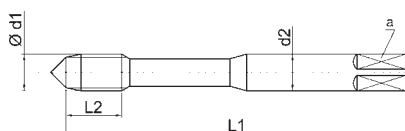

Bestell - Nr. - Cat. No.	H41TLW	H41TLWKK		
Norm - Standard	DIN 371/376	DIN 371/376		
Schneidstoff - Tool material	HSSE/PM	HSSE/PM		
Oberfläche - Surface	TLW	TLW		
Toleranz - Tolerance	6HX	6HX		
Anschnittform - Chamfer form	C/2-3			

Einsatzgebiet - Application	1.4 - 1.5	1.4 - 1.5		
	3.3 - 3.4	3.3 - 3.4		

Ød1	p	L1	L2	Ød2	a	
M3	0,5	56	5	3,5	2,7	2,5
M4	0,7	63	7	4,5	3,4	3,3
M5	0,8	70	8	6	4,9	4,2
M6	1	80	10	6	4,9	5
M8	1,25	90	13	8	6,2	6,8
M10	1,5	100	15	10	8	8,5
M12	1,75	110	18	9	7	10,3
M14	2	110	20	11	9	12
M16	2	110	20	12	9	14

Identnummer - Code	
H41TLWM03050	-
H41TLWM04070	-
H41TLWM05080	-
H41TLWM06100	H41TLWKKM06100
H41TLWM08125	H41TLWKKM08125
H41TLWM10150	H41TLWKKM10150
H41TLWM12175	H41TLWKKM12175
H41TLWM14200	H41TLWKKM14200
H41TLWM16200	H41TLWKKM16200