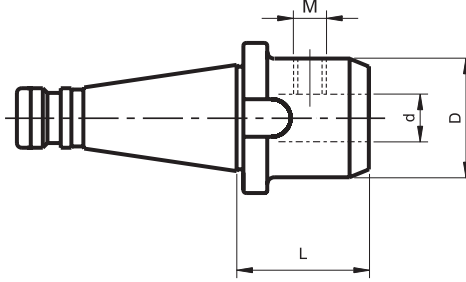


ISO VELDON TUTUCULAR

DIN 2080

ISO 2583


DIN 6359
DIN 1835-B

- MALZEME : 20 Mn Cr5
- SERTLİK : 58 ± 2 HRc
(Derinlik 0,6-0,9 mm)
- AÇI : DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI : MAX. 0,006 mm

KOD	KONİK	d (mm)	L (mm)	D (mm)	VELDON CİVATASI	CİVATA ADEĐİ	FİYAT EUR
ISO40.06.V	ISO 40	6	50	25	M6x10	1	
ISO40.08.V	ISO 40	8	50	28	M8x10	1	
ISO40.10.V	ISO 40	10	50	35	M10x12	1	
ISO40.12.V	ISO 40	12	50	42	M12x16	1	
ISO40.14.V	ISO 40	14	50	44	M12x16	1	
ISO40.16.V	ISO 40	16	63	48	M14x16	1	
ISO40.18.V	ISO 40	18	63	50	M14x16	1	
ISO40.20.V	ISO 40	20	63	52	M16x16	1	
ISO40.25.V	ISO 40	25	80	64	M18x20	2	
ISO40.32.V	ISO 40	32	80	72	M20x20	2	
ISO40.40.V	ISO 40	40	90	80	M20x20	2	
ISO50.20.V	ISO 50	20	63	52	M16x16	1	
ISO50.25.V	ISO 50	25	80	64	M18x20	2	
ISO50.32.V	ISO 50	32	80	72	M20x20	2	
ISO50.40.V	ISO 50	40	90	80	M20x20	2	