
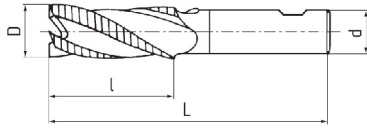


$\lambda=30^\circ$
 $\gamma=12^\circ$
Type
NRDIN
844ISO
1641Z
4

KISA KABATALAŞ FREZE DIN 844 NR

D	l	L	d h6	Z
6	13	57	6	4
7	16	66	10	4
8	19	69	10	4
9	19	69	10	4
10	22	72	10	4
11	22	79	12	4
12	26	83	12	4
13	26	83	12	4
14	26	83	12	4
15	26	83	12	4
16	32	92	16	4
17	32	92	16	4
18	32	92	16	4
20	38	104	20	4
22	38	104	20	5
24	45	121	25	5
25	45	121	25	5
26	45	121	25	5
28	45	121	25	5
30	45	121	25	5
32	53	133	32	6

TEKNİK ÖZELLİKLERİ

HSS
Co8

DIN 1835B

Type
NR

Düşük ve orta dayanımlı malzemelerin (700 MPa'a kadar) kaba operasyonları için kullanılır
Yüzey kalitesi Ra 12,5 ve daha yüksek

HSS
Co8

Yüksek hız çeliği
%8 kobaltlı

KULLANIM ALANI

- Alaşımsız çelikler (180 HB)
- Yapı çelikleri (Sertlik:24 Hrc)
- Sementasyon nitrürasyon çelikleri (Sertlik:27,1 Hrc)
- Dökme demir (Max.240 HB)
- Korozyona ve asite dayanıklı çelikler (Sertlik:24,8 Hrc)